

26 (NH₄-N), 50% total phosphorus (TP), and 54% dissolved reactive phosphorus (DRP)
27 were measured in 1 m deep woodchip filters, which was greater than the reductions in
28 0.6 m deep woodchip filters. Woodchip filters also performed optimally when loaded
29 at a high OLR (155 g COD m⁻² d⁻¹), although the removal mechanism was primarily
30 physical (i.e. straining) as opposed to biological. When operated at the same OLR and
31 when of the same depth, the sand filters had better COD removals (96%) than
32 woodchip (74%), but there was no significant difference between them in the removal
33 of SS and NH₄-N. However, the likelihood of clogging makes sand filters less
34 desirable than woodchip filters. Using the optimal designs of both configurations, the
35 filter area required per cow for a woodchip filter is more than four times less than for
36 a sand filter. Therefore, this study found that woodchip filters are more economically
37 and environmentally effective in the treatment of DSW than sand filters, and optimal
38 performance may be achieved using woodchip filters with a depth of at least 1 m,
39 operated at an OLR of 155 g COD m⁻² d⁻¹.

40

41 *Keywords:* Passive filtration; woodchip; sand; dairy soiled water; organic loading rate.

42

43 **1. Introduction**

44 Dairy soiled water (DSW) (variously referred to as dairy effluent (Longhurst et al.,
45 2000; McFarland et al., 2003), dairy dirty water (Cannon et al., 2000; Moir et al.,
46 2005), or milk-house washwater (Joy et al., 2001)), is a variable strength dairy
47 effluent (typical range 1000 – 10000 mg 5-day biochemical oxygen demand (BOD₅)
48 L⁻¹) comprising milking parlour and holding area washings generated in large but
49 variable volumes (27 – 148 L cow⁻¹ d⁻¹), and is characterised by low dry matter (DM)
50 content (typically < 3 - 4%). Nutrient concentrations in DSW vary considerably,

51 typically between 70 to 500 mg total nitrogen (TN) L⁻¹ and 20 to >100 mg total
52 phosphorus (TP) L⁻¹ (Minogue et al., 2015). The volume and strength of DSW is
53 seasonal and depends on farm management practices, including the efficiency of
54 milking systems (Sweeten and Wolfe, 1994), size of herd, and amount of rainfall-
55 generated runoff from uncovered hard standings (Minogue et al., 2015). Dairy soiled
56 water is collected separately from dairy slurry and the main disposal route is directly
57 to land via landspreading or irrigation without any prior treatment. Because of its high
58 volume and often unpredictable composition, DSW is frequently perceived to be of
59 little or no agronomic benefit and is often applied repeatedly to land adjacent to the
60 milking parlour (Wang et al., 2004). Storage of DSW is required at locations where
61 landspreading is restricted due to adverse weather conditions, soil type, soil
62 conditions, ground slope, proximity to water sources, and volumetric spreading
63 limitations. In Ireland, for example, there is a legal requirement to provide a DSW
64 storage capacity of 10 - 15 days (S.I. No. 31 of 2014), which results in increased
65 infrastructure and associated costs for the dairy farmer. These costs, combined with
66 the low nutrient replacement value of the DSW, mean that treatment and reuse may be
67 a better option for the farmer.

68

69 The environmental impacts of repeated spreading of DSW on lands are well
70 documented (e.g. Fenton et al., 2011), and may result in oxygen depletion and
71 asphyxiation of aquatic life in surface waters, as well as a risk of nutrient leaching to
72 groundwater (Knudsen et al., 2006). Long-term DSW application to lands may also
73 result in soil accumulation of phosphorus (P) and heavy metals and increase
74 concentrations of microbial pathogens, odorants and oestrogens in the receiving
75 environment (Wang et al., 2004; Hao et al., 2008). Hence, there is a real need for cost-

76 effective, low energy, and low maintenance on-farm treatment processes that would
77 result in a reduced risk of pollution following application to land. Some multi-stage
78 biological treatment processes, such as combined sequencing batch reactors (SBRs)
79 and constructed wetlands (CWs) (Moir et al., 2005), and aerated settling tanks
80 followed by vertical flow CWs (Merlin and Gaillot, 2010), have been used with
81 varying degrees of success; however, much of the organic and nutrient reductions in
82 these studies have been reported to occur in the aeration rather than in the passive
83 processes. Passive treatment systems such as sand filters (Rodgers et al., 2005; Healy
84 et al., 2007) and woodchip filters (Ruane et al., 2011; McCarthy et al., 2015) have
85 also been investigated and have reported consistently high levels of organic, nutrient
86 and pathogenic removal. Woodchip, in particular, is a cheap, biodegradable material
87 which has potential use as a soil improver (Cogliastro et al., 2001; Miller and
88 Seastedt, 2009) and has previously shown to be effective in improving effluent quality
89 and ammonia emissions when used in out-wintering pads (Dumont et al., 2012).

90

91 In order to realise the full potential of woodchip filters, it is necessary to determine
92 the optimum media depths which will produce consistently high quality effluent when
93 subjected to variable strength influent DSW loading. Filters are usually designed and
94 operated with one hydraulic regime selected to deliver an optimum organic loading
95 rate (OLR). However, as the concentration of DSW varies seasonally (Rodgers et al.,
96 2005), woodchip filters may be subjected to OLRs far in excess of their design
97 capacity. Therefore, it is necessary to examine the performance of filters under these
98 extreme conditions. Limited information is available on the impact of woodchip filter
99 depths and OLRs on the quality of treated DSW effluent. Additionally, no information

100 is available on the comparative performances of woodchip and sand filters when
101 treating on-farm DSW.

102

103 As there are still knowledge gaps concerning the optimal design and operation of
104 woodchip filters for the treatment of DSW, including the appropriate OLR and filter
105 depth for optimal performance, the objectives of this study were to examine the
106 impacts of filter depth and OLR on their performance when loaded with DSW and to
107 compare them to sand filters operated under the same experimental conditions. An
108 overarching objective of the study was to contribute to an improved understanding of
109 the factors which should be considered in the design, construction and management of
110 passive woodchip filters to treat on-farm DSW. Once such factors are resolved, pilot-
111 scale filters may be effectively operated on the farm.

112

113 **2. Materials and Methods**

114 Eighteen filters, with internal diameters of 0.1 m and depths of either 0.6 m (n=3
115 columns) or 1 m (n=15 columns), were constructed using uPVC. All filters were open
116 at the top and sealed at the base using uPVC end caps. The columns were placed on
117 timber support frames and located in a temperature-controlled room at 10.6 ± 0.7 °C
118 and relative humidity of 86.9 ± 4.5 % (replicating the average temperature and
119 humidity in Ireland). A 0.075 m layer of clean, crushed pea gravel, manually sieved to
120 a particle size of 10 – 14 mm, was placed at the base of each column to prevent
121 washout of the filter media. Each column was then filled with either woodchip (with a
122 particle size of 10 – 20 mm) or sand (effective size, $d_{10} = 0.2$, uniformity coefficient,
123 $UC = 1.4$) by placing the selected media in 0.050 m lightly tamped increments.
124 Influent DSW was pumped intermittently (four times per day, seven days per week)

125 onto the filters using peristaltic pumps controlled by electronic timers. Hydraulic
126 loading rates were adjusted using the manual flow control on the pumps and influent
127 was distributed evenly across the surface of the filter media using perforated uPVC
128 flow distribution plates (Fig. 1). Continuously operated submersible mixers were
129 placed in each DSW influent container (one container per column set) to prevent
130 stratification. Treated effluent samples from each filter were collected in an effluent
131 collection container and all influent DSW samples were taken simultaneously from
132 the influent containers.

133

134 To clean any organic material from the media, 70 L of potable water was pumped
135 onto each filter over a period of 5 days prior to their operation, before being
136 intermittently loaded with DSW for a period of 56 days. On day 15 of operation, each
137 filter was seeded with 500 mL of nitrifying activated sludge (mixed liquor suspended
138 solids, MLSS = 6,290 mg L⁻¹; sludge volume index, SVI = 143) collected from a local
139 wastewater treatment plant. The period from day 0 to 56 was taken as the start-up
140 period to reach steady state operation (defined by consistent chemical oxygen demand
141 (COD), N and P effluent concentrations) for all filters and therefore day 56 was taken
142 as the effective start day of the study (day 0).

143

144 This study compared three different operational setups to examine the impacts of (1)
145 filter depth (2) OLR and (3) type of media (woodchip/sand) on filter performance.
146 The filter configurations (Fig. 2) were (1) 0.6 and 1 m deep woodchip filters operating
147 for 105 days with an average OLR of 120 g COD m⁻² d⁻¹ (2) 1 m deep woodchip
148 filters operating for 105 days with average OLRs of 50 and 155 g COD m⁻² d⁻¹, and
149 (3) 1 m deep woodchip and sand filters operating for 220 days with an average OLR

150 of 35 g COD m⁻² d⁻¹. All configurations and treatments were constructed and operated
151 at n=3. The very high OLRs (120 and 155 g COD m⁻² d⁻¹) were selected to assess the
152 performance of filters under extreme loading events, which may arise if a filter is
153 designed and hydraulically loaded assuming a low influent organic concentration.

154

155 Dairy soiled water was collected weekly for the duration of the experiments in 25 L
156 capacity containers from a dedicated DSW collection tank at a 150 cow dairy farm in
157 south west Ireland (51°37'35.8"N 8°46'06.6"W). A submersible pump was used to fill
158 the containers, which were then transferred directly to a temperature-controlled room
159 in the laboratory. The average physical and chemical characteristics of the influent
160 DSW are shown in Table 1.

161

162 The woodchip used was a commercial tree species, Sitca spruce (*Picea sitchensis*).
163 Logs were debarked and then chipped using an industrial wood chipping machine
164 (Morbark post peeler) at an industrial facility in northwest Ireland. The woodchips
165 were sieved to a 10 – 20 mm grading prior to placing in the filter columns. The sand
166 used was sourced from a commercial quarry in Co. Galway, West of Ireland and was
167 graded to a d₁₀ of 0.2 mm and a UC of 1.4. The permeability of the saturated
168 woodchip and sand (Table 2) was measured using the constant head permeability test
169 in accordance with BS 1377-5 (BSI, 1990).

170

171 The ability of the woodchip and sand media to remove N (measured as ammonium-N
172 (NH₄-N)) and P (measured as dissolved reactive phosphorus (DRP)) from the DSW
173 was investigated in a batch experiment by placing varying masses of the washed,
174 graded media in flasks (n=3) and adding 40 mL of raw DSW to each sample. All

175 samples were shaken for 24 h at 250 excursions per minute (epm) on a reciprocating
176 shaker and on removal, were allowed to settle for 1 h, filtered through a 0.45 μm
177 filter, and tested colorimetrically using a nutrient analyser (Konelab 20, Thermo
178 Clinical Laboratories Systems, Finland). The data were then modelled using a
179 Langmuir isotherm to establish maximum adsorption capacities (Table 2).

180

181 Influent samples and effluent taken from each filter column were tested for pH using a
182 pH probe (WTW, Germany) and for suspended solids (SS) using vacuum filtration on
183 a well-mixed subsample through Whatman GF/C (pore size 1.2 μm) filter paper. Sub-
184 samples were filtered through 0.45 μm filters and analysed colorimetrically for DRP,
185 $\text{NH}_4\text{-N}$, total oxidised nitrogen (TON) and nitrite-N ($\text{NO}_2\text{-N}$) using a nutrient
186 analyser (Konelab 20, Thermo Clinical Labsystems, Finland). Nitrate-N was
187 calculated by subtracting $\text{NO}_2\text{-N}$ from TON. Unfiltered samples were tested for TP
188 and filtered (0.45 μm) samples for total dissolved phosphorus (TDP) using acid
189 persulphate digestion. Particulate phosphorus (PP) was calculated by subtracting TDP
190 from TP. Unfiltered samples were tested for TN using a BioTector Analyzer
191 (BioTector Analytical Systems Ltd., Cork, Ireland) and for COD (dichromate
192 method). Influent DSW was tested for DM content by drying at 105 $^\circ\text{C}$ for 24 h. All
193 water quality parameters were tested in accordance with standard methods (APHA,
194 2005).

195

196 **2.1 Statistical analysis**

197 The data were analysed using independent sample t-tests in SPSS (IBM SPSS
198 Statistics 20 Core System) with column depth, OLRs and filter media as grouping
199 variables. The data were checked for normality and, where necessary, were log

200 transformed to satisfy the normal distributional assumptions required. Where
201 normality was not achieved, the non-parametric Mann Whitney U test was used.
202 Probability values of $p > 0.05$ were deemed not to be significant.

203

204 **3. Results and Discussion**

205

206 **3.1 Impact of media depth**

207 Treated effluent concentrations from the 1 m deep woodchip filters were consistently
208 lower than those from the 0.6 m deep filters for all measured parameters at an OLR of
209 $120 \text{ g COD m}^{-2} \text{ d}^{-1}$ (Fig. 3). However, the concentrations for COD in the final effluent
210 ($1469 \pm 587 \text{ mg L}^{-1}$ for the 0.6 m filter and $587 \pm 113 \text{ mg L}^{-1}$ for the 1 m filter) were still
211 far in excess of the limit value for discharge to urban waters (125 mg L^{-1} ; SI No 254
212 of 2001). The 0.6 m deep filters reduced COD, SS, TP and DRP by 46%, 54%, 7%
213 and 5%, respectively (based on average influent and effluent concentrations), but did
214 not reduce TN and $\text{NH}_4\text{-N}$ concentrations to below those of the influent. Reductions
215 of 78% COD, 95% SS, 85% TN, 82% $\text{NH}_4\text{-N}$, 50% TP and 54% DRP were measured
216 for the 1 m deep filters and were consistent with those of Ruane et al. (2011), who
217 measured reductions of 66% COD and 57% TN for 1 m deep woodchip filter pads
218 operating at an average OLR of $173 \pm 43 \text{ g COD m}^{-2} \text{ d}^{-1}$ for a 1 year period. These
219 findings indicate that filter depth is an important consideration in the design of
220 woodchip filters, as the 0.6 m deep filters did not provide sufficient detention time to
221 reduce COD and SS by more than approximately 50% at an average OLR of 120 g
222 $\text{COD m}^{-2} \text{ d}^{-1}$. These removals were increased by a factor of approximately 1.7 when
223 the filter depth was increased to 1 m with consequent increase in detention time.

224

225 Ammonium-N was not nitrified in any of the woodchip filters and this was most
226 likely as a result of the high average C:N ratio (30) of the influent DSW, which was
227 far above the optimum C:N ratio of 3 - 6 for nitrification (Henze et al., 2001; Eding et
228 al., 2006). This, combined with a high OLR ($120 \text{ g COD m}^{-2} \text{ d}^{-1}$), likely resulted in the
229 formation of a dense, non-porous heterotrophic biofilm structure, reducing the
230 available sites for the slow growing nitrifiers (Okabe et al., 1996; Wijeyekoon et al.,
231 2004; Nogueira et al., 2002). A nitrogen mass balance between influent and effluent
232 carried out on the 0.6 m deep filters showed that the mass of organic nitrogen (N_{org})
233 was reduced by 23% while the mass of NH₄-N increased by 8%, with no overall TN
234 removal. For the 1 m deep filters, the mass of N_{org} was reduced by 37% with a
235 corresponding reduction in NH₄-N of 82% and an overall decrease in TN of 85%,
236 with NH₄-N as the dominant fraction in the final effluent. Therefore, while significant
237 TN and NH₄-N removals were achieved in the 1 m deep filters (85% and 82%,
238 respectively), the removal processes were by physical filtration of SS and associated
239 N (Fig. 4(A)) rather than biological transformations. Much lower SS removals were
240 measured in the 0.6 m deep filters (Fig. 3). The average pH of the treated effluent was
241 7.41 ± 0.26 , indicating that alkalinity was not an inhibiting factor for nitrification.
242 Ruane et al. (2011) reported an average concentration of $22.5 \text{ mg NO}_3\text{-N L}^{-1}$ in treated
243 effluent from 1 m deep woodchip filter pads loaded with DSW, which had an average
244 influent concentration of $12.9 \text{ mg NO}_3\text{-N L}^{-1}$ and C:N ratio of 16. In the current study,
245 there was no NO₃-N in the influent and this may have influenced the biofilm
246 formation and consequent opportunity for development of NH₄-N oxidizers (Okabe et
247 al., 1996).

248

249 **3.2 Impact of organic loading rates**

250 There were no significant differences in the final effluent concentrations of $\text{NH}_4\text{-N}$
251 (4.1 ± 4.1 ; 4.6 ± 4.2 mg L^{-1}) and SS (23 ± 16 ; 37 ± 22 mg L^{-1}) from the 1 m deep woodchip
252 filters operated at OLRs of 50 and 155 $\text{g COD m}^{-2} \text{d}^{-1}$; however, the average effluent
253 DRP concentration (3.8 ± 1.5 mg L^{-1}) from the 50 $\text{g COD m}^{-2} \text{d}^{-1}$ filters was
254 significantly lower ($p<0.001$) than from the 155 $\text{g COD m}^{-2} \text{d}^{-1}$ filters (10.2 ± 2.9 mg L^{-1}).
255 As the woodchip had no ability to adsorb P (Table 2), physical removal was the
256 main mechanism for P removal. Based on the influent and effluent loading rates, 2.5
257 mg PP d^{-1} (318 $\text{mg PP m}^{-3} \text{d}^{-1}$) was retained in the 155 $\text{g COD m}^{-2} \text{d}^{-1}$ filters, whereas
258 0.4 mg PP d^{-1} (51 $\text{mg PP m}^{-3} \text{d}^{-1}$) was retained in the 50 $\text{g COD m}^{-2} \text{d}^{-1}$ filters.

259

260 Removals (based on the average influent and effluent load and expressed in mg d^{-1}) in
261 the range of 71% to 97% were measured for COD, SS, TN and $\text{NH}_4\text{-N}$, and 54% to
262 74% for TP and DRP, were measured in both sets of filters. Final effluent
263 concentrations of SS, $\text{NH}_4\text{-N}$ and DRP ranged from 23 to 37 mg L^{-1} , 4.1 to 4.6 mg L^{-1} ,
264 and 3.8 to 10.4 mg L^{-1} , respectively. However, the final effluent COD concentrations
265 from both filters (766 ± 221 mg L^{-1} for the 50 $\text{g COD m}^{-2} \text{d}^{-1}$ filters and 604 ± 112 mg L^{-1}
266 for the 155 $\text{g COD m}^{-2} \text{d}^{-1}$ filters) were well above the limit values for discharge to
267 urban waters in Ireland (S.I. No 254 of 2001). Effluent mass loads for COD, SS, $\text{NH}_4\text{-N}$
268 and DRP (Fig. 5) remained consistent over the duration of the study period,
269 highlighting the capacity of the filters to effectively and consistently treat variable
270 strength and variably loaded influent DSW.

271

272 Negligible $\text{NO}_3\text{-N}$ concentrations were measured in the effluent, underlining the
273 reliance on physical filtration for $\text{NH}_4\text{-N}$ removal as illustrated by the close
274 correlations between SS and $\text{NH}_4\text{-N}$ mass removals for both loading rates (Fig 4(B)).

275

276 **3.3 Impact of filter media**

277 There were no significant differences between the treated effluent from 1 m deep
278 woodchip and 1 m deep sand media (average OLR = 35 g COD m⁻² d⁻¹) for SS (23±13
279 and 16±20 mg L⁻¹) and NH₄-N (2.9±3.4 and 0.8±0.5 mg L⁻¹); however, the sand
280 outperformed the woodchip in COD removal (a final effluent of 146±52 mg L⁻¹ versus
281 873±242 mg L⁻¹) and DRP removal up to day 150 (a final effluent of 0.1±0.1 mg DRP
282 L⁻¹ versus 4.9±2.7 mg DRP L⁻¹). The enhanced COD removals in the sand filters were
283 reflective of their higher hydraulic retention time when compared to the woodchip
284 filters (the hydraulic conductivity of the sand was >40 times lower than that of the
285 woodchip (Table 2)). The enhanced DRP removals in the sand filters were as a result
286 of their higher P adsorption capacity (136 g DRP kg⁻¹) compared with the woodchip,
287 which had no affinity for P, and DRP reductions in the woodchip filters were
288 associated with SS removals (Fig. 4(C)). After 150 days of operation, DRP
289 breakthrough occurred quite quickly in the sand filters and at a slower rate in the
290 woodchip filters (Fig. 3). From day 200 to the end of the study, neither the sand nor
291 the woodchip filters removed any DRP from the influent DSW (Fig. 3). The average
292 mass of P retained up to day 150 was 1.61±1.30 and 3.89±0.76 mg TP d⁻¹, 0.61±0.31
293 and 0.96±0.32 mg PP d⁻¹ and 1.33±0.84 and 2.58±0.60 mg DRP d⁻¹ for woodchip and
294 sand filters, respectively, indicating that the sand was more effective at removing PP
295 and also had a greater affinity for adsorption of DRP (Table 2). The mass removal
296 rates also indicate that sand had more consistent P removal than woodchip up to day
297 150.

298

299 During the first 85 days of operation, nitrification occurred in the sand filters and the
300 $\text{NO}_3\text{-N}$ concentration rose from $0.1\pm 0.1 \text{ mg L}^{-1}$ in the influent to $43\pm 18 \text{ mg L}^{-1}$ in the
301 effluent. However, the effluent $\text{NO}_3\text{-N}$ subsequently reduced considerably, and
302 attained an average concentration of $7.2\pm 1.6 \text{ mg L}^{-1}$ by the end of the study (Fig. 3).
303 The reasons for the suppressed levels of $\text{NO}_3\text{-N}$ were possibly due to the preferential
304 formation of heterotrophic-dominated biofilm layers limiting dissolved oxygen (DO)
305 to the nitrifiers (Nogueira et al., 2002) as a consequence of the high influent C:N
306 ratios in the influent wastewater (average of 38). Negligible $\text{NO}_3\text{-N}$ concentrations
307 were measured in the treated effluent from the woodchip filters and were always
308 below $0.21\pm 0.19 \text{ mg L}^{-1}$. This indicates that even at the low OLRs used in this study,
309 which are at the upper limit at which nitrification normally occurs in sand filters
310 treating a similar type of wastewater (around $30 \text{ g COD m}^{-2} \text{ d}^{-1}$; Rodgers et al., 2005),
311 woodchip filters are unable to nitrify DSW.

312

313 **3.4 Assessment of optimum filter media, configuration and operation**

314 When assessing the suitability of the filters to treat on-farm DSW, key operating
315 criteria must be taken into account, together with the main objective of reducing
316 organic and nutrient concentrations to levels which would not adversely impact the
317 environment if landspread. These operating criteria include items such as cost and
318 availability of the media, robustness and longevity of performance (i.e. how well can
319 media deal with daily and seasonal variations in flow and strength and for how long),
320 biodegradability, and disposal of spent media.

321

322 The results of this study show that woodchip filters should have a minimum depth of
323 1 m to achieve required removals and can reduce the measured water quality

324 parameters at OLRs up to at least $155 \text{ g COD m}^{-2} \text{ d}^{-1}$. However, based on the N mass
325 balances and effluent concentrations of $\text{NO}_3\text{-N}$ measured in this study, the removal
326 mechanisms in woodchip filters are primarily physical (straining) and not biological
327 (nitrification did not occur). The suppression of biological activity may have been a
328 function of the OLRs employed in this study, where the lowest OLR studied (35 g
329 $\text{COD m}^{-2} \text{ d}^{-1}$) was still at the upper limit at which nitrification normally occurs in
330 filters (Rodgers et al., 2005).

331

332 Biological N transformations are a sustainable long-term process to reduce effluent N
333 when compared to removal by physical straining alone. While nitrification was not
334 observed to occur in the woodchip filters in the current study, other studies (e.g.
335 Carney et al., 2011) have reported its occurrence for piggery wastewaters at OLRs in
336 the range $14 - 128 \text{ g COD m}^{-2} \text{ d}^{-1}$. Nitrification of DSW in sand filters has been
337 reported in many studies (e.g. Rodgers et al., 2005; Healy et al., 2011) at OLRs in the
338 range $20 - 40 \text{ g COD m}^{-2} \text{ d}^{-1}$. Given that the composition of raw DSW normally
339 contains very low, if any, NO_2 or NO_3 concentrations (Minogue et al, 2015), long
340 start-up times are likely to be required to establish an active population of NH_4
341 oxidizers in any filter medium (Okabe et al, 1996; Lekang and Kleppe, 2000).

342

343 Surface clogging of the filter media is an operational issue that must be considered for
344 on-farm use and while neither the sand nor the woodchip media in this study
345 experienced surface clogging, Healy et al. (2007) reported clogging of sand filters
346 after 42 days at an OLR of $43 \text{ g COD m}^{-2} \text{ d}^{-1}$. In contrast, we are not aware of any
347 reported issues with surface clogging of woodchip media, and it has been estimated

348 that a woodchip filter may be operational for 2 – 3 years before surface ponding
349 occurs (Ruane et al., 2011).

350

351 The decision to use woodchip or sand filter media is ultimately taken by synthesizing
352 environmental benefits versus capital and operating costs. Operating costs are similar
353 for both woodchip and sand filters (the modes of operation are identical for both),
354 while capital costs are differentiated only by the cost of the media (filter setup for
355 woodchip and sand are similar), which may also not differ significantly and will be
356 location specific. Cost comparisons therefore can be made by comparing the required
357 footprint of woodchip and sand media, both at a depth of 1 m – the minimum
358 acceptable filter depth identified in this study. Based on the optimal OLRs identified
359 in this study (an OLR of $155 \text{ g COD m}^{-2} \text{ d}^{-1}$ for woodchip filters, which treated the
360 wastewater through physical processes, if not necessarily biological processes, and an
361 OLR of $35 \text{ g COD m}^{-2} \text{ d}^{-1}$ for sand filters, which only temporarily caused the
362 occurrence of nitrification, but clearly was at the upper OLR limit at which such
363 filters may be operated), a filter surface area of $0.48 \text{ m}^2 \text{ cow}^{-1}$ for woodchip versus 2.1
364 $\text{m}^2 \text{ cow}^{-1}$ for sand would be required (Table 3). The larger area required for the sand
365 filter combined with their lack of robustness to deal with shock loads (Healy et al.,
366 2007) and the potential for surface clogging (Rodgers et al., 2005), indicate that
367 woodchip filters are a better on-farm treatment option.

368

369 The optimal filter configuration identified in the current study produced a final
370 effluent that was in excess of permissible discharge standards. For the water to be
371 discharged to surface waters, some form of primary and tertiary treatment may be
372 required. Primary treatment may consist of a simple sedimentation tank upstream of

373 the woodchip filters to reduce SS in the influent DSW, and tertiary treatment might
374 comprise the addition of downstream polishing filters using, for example, zeolite for
375 enhanced N removal and flue gas desulphurization (FGD) gypsum for enhanced P
376 removal. However, this would be costly for the farmer and, moreover, would mean
377 that a discharge license may be required. Additionally, the technical and economic
378 feasibility of using such tertiary media to act as polishing filters for DSW treatment
379 would need to be established. Based on the results of the current study, a 1 m deep
380 woodchip filter, with an OLR of $155 \text{ g COD m}^{-2} \text{ d}^{-1}$, may retain up 600 mg SS d^{-1}
381 (Fig. 5) and may reduce over 90% of the SS. Therefore, the liquid portion of the
382 wastewater may be used in irrigation, which requires no discharge license or transport
383 costs, and is safer (Augustenborg et al., 2008a); and, once exhausted, the spent timber
384 residue may be incorporated into the soil (Augustenborg et al., 2008b).

385

386 **4. Conclusions**

387 On the basis of this study, woodchip filters are more effective in the treatment of
388 DSW than sand filters. In this study, optimal performance in terms of mass of
389 contaminants removed per day was achieved using a 1 m deep woodchip filter
390 operated at an OLR of $155 \text{ g COD m}^{-2} \text{ d}^{-1}$. Filtration was the dominant mechanism for
391 N removal in the woodchip filters. The final effluent was above the concentrations at
392 which it may be legally discharged to receiving waters. Therefore, management
393 option employed to re-use the final effluent may be to use the liquid portion of the
394 effluent in irrigation and, in time, to incorporate the spent timber residue into the soil.

395

396

397 **References**

- 398 Augustenborg, C.A., Carton, O.T., Schulte, R.P.O., Suffet, I.H. 2008a. Response of
399 silage yield to land application of out-wintering pad effluent in Ireland.
400 *Agricultural Water Management* 95: 367-374.
401
- 402 Augustenborg, C.A., Carton, O.T., Schulte, R.P.O., Suffet, I.H. 2008b. Silage dry-
403 matter yield and nitrogen response following land application of spent timber
404 residue from out-wintering pads to Irish grassland. *Communications in Soil
405 Science and Plant Analysis* 39: 1122 – 1137.
406
- 407 APHA, 2005. Standard methods for the examination of water and wastewater,
408 American Public Health Association, American Water Works Association, Water
409 Pollution Control Federation, Washington, DC.
410
- 411 British Standards Institution. 1990. British standard methods of test for soils for civil
412 engineering purposes. Part 5: Compressibility, permeability and durability tests.
413 BS 1377-5:1990. BSI, London.
414
- 415 Cannon, A.D., Gray, K.R., Biddlestone, A.J., Thayanithy, K. 2000. SE—structures
416 and environment: pilot-scale development of a bioreactor for the treatment of
417 dairy dirty water. *Journal of Agricultural Engineering Research* 77: 327-334.
418
- 419 Carney, K., Rodgers, M., Lawlor, P.G., Zhan, X. 2011. A sustainable technology for
420 the treatment of piggery wastewaters. In: *Proceedings of the Global Conference
421 on Global Warming*, 11 – 14 July, Lisbon, Portugal.
- 422 Cogliastro, A., Domon, G., Daigle, S., 2001. Effects of wastewater sludge and
423 woodchip combinations on soil properties and growth of planted hardwood trees
424 and willows on a restored site. *Ecological Engineering* 16: 471-485.
- 425 Dumont, P.A., Chadwick, D.R., Misselbrook, T.H., Robinson, J.S., Smith, K.A.,
426 Sagoo, E., Camp, V., Murray, R., French, P., Hill, R.A., Scott, A., 2012. Effluent
427 quality and ammonia emissions from out-wintering pads in England, Wales and
428 Ireland. *Agriculture, Ecosystems & Environment* 160: 82-90.
- 429 Eding, E.H., Kamstra, A., Verreth, J.A.J., Huisman, E.A., Klapwijk, A., 2006. Design
430 and operation of nitrifying trickling filters in recirculating aquaculture: a review.
431 *Aquacultural Engineering* 34: 234-260.
- 432 Hao, X., Godlinski, F., Chang, C., 2008. Distribution of phosphorus forms in soil
433 following long-term continuous and discontinuous cattle manure applications.
434 *Soil Science Society of America Journal* 72: 90-97.
- 435 Joy, D., Weil, C., Crolla, A., Bonte-Gelok, S., 2001. New technologies for on-site
436 domestic and agricultural wastewater treatment. *Canadian Journal of Civil
437 Engineering* 28: 115-123.
- 438 Fenton, O., Serrenho, A., Healy, M.G. 2011. Evaluation of amendments to control
439 phosphorus losses in runoff from dairy-soiled water. *Water, Air, & Soil Pollution*
440 222: 185-194.

- 441 Healy, M.G., Rodgers, M. and Mulqueen, J. 2007. Performance of a stratified sand
 442 filter in removal of chemical oxygen demand, total suspended solids and
 443 ammonia nitrogen from high-strength wastewaters. *Journal of Environmental*
 444 *Management* 83: 409-415.
- 445 Healy, M., Rodgers, M., Walsh, G. 2011. Different depth sand filters for laboratory
 446 treatment of synthetic wastewater with concentrations close to measured septic
 447 tank effluent. *Journal of Environmental Science and Health, Part A:*
 448 *Toxic/Hazardous Substances and Environmental Engineering* 46: 80 – 85.
- 449 Henze, M., Harremoes, P., la Cour Jansen, J., Arvin, E. 2001. *Wastewater treatment:*
 450 *biological and chemical processes.* Springer Science & Business Media.
- 451 Knudsen, M.T., Kristensen, I.S., Berntsen, J., Petersen, B.M., Kristensen, E.S. 2006.
 452 Estimated N leaching losses for organic and conventional farming in Denmark.
 453 *The Journal of Agricultural Science* 144: 135-149.
- 454 Lekang, O.I. and Kleppe, H. 2000. Efficiency of nitrification in trickling filters using
 455 different filter media. *Aquacultural Engineering*, 21: 181-199.
- 456 Longhurst, R.D., Roberts, A.H.C., O'Connor, M.B. 2000. Farm dairy effluent: a
 457 review of published data on chemical and physical characteristics in New
 458 Zealand. *New Zealand Journal of Agricultural Research* 43: 7-14.
- 459 McCarthy, G., Lawlor, P.G., Carney, K.N., Zhan, X., Gutierrez, M., Gardiner, G.E.
 460 2015. An investigation into the removal of Salmonella and enteric indicator
 461 bacteria from the separated liquid fraction of raw or anaerobically digested pig
 462 manure using novel on-farm woodchip biofilters. *Science of the Total*
 463 *Environment* 514: 140-146.
- 464 McFarland, A.M.S., Hauck, L.M., Kruzic, A.P. 2003. Phosphorus reductions in runoff
 465 and soils from land-applied dairy effluent using chemical amendments: An
 466 observation. *The Texas Journal of Agriculture and Natural Resource* 16: 47-59.
- 467 Merlin, G., Gaillot, A. 2010. Treatment of dairy farm effluents using a settling tank
 468 and reed beds: performance analysis of a farm-scale system. *Transactions of the*
 469 *ASABE* 53: 1681-1688.
- 470 Miller, E.M., Seastedt, T.R. 2009. Impacts of woodchip amendments and soil nutrient
 471 availability on understory vegetation establishment following thinning of a
 472 ponderosa pine forest. *Forest Ecology and Management*, 258: 263-272.
- 473 Minogue, D., French, P., Bolger, T. and Murphy, P.N.C. 2015. Characterisation of
 474 dairy soiled water in a survey of 60 Irish dairy farms. *Irish Journal of*
 475 *Agricultural and Food Research* 54: 1-16.
- 476 Moir, S.E., Svoboda, I., Sym, G., Clark, J., McGechan, M.B., Castle, K. 2005. An
 477 experimental plant for testing methods of treating dilute farm effluents and dirty
 478 water. *Biosystems Engineering* 90: 349-355.
- 479 Nogueira, R., Melo, L.F., Purkhold, U., Wuertz, S. and Wagner, M., 2002. Nitrifying
 480 and heterotrophic population dynamics in biofilm reactors: effects of hydraulic
 481 retention time and the presence of organic carbon. *Water Research* 36: 469-481.

- 482 Okabe, S., Oozawa, Y., Hirata, K. and Watanabe, Y. 1996. Relationship between
483 population dynamics of nitrifiers in biofilms and reactor performance at various
484 C: N ratios. Water Research 30: 1563-1572.
- 485 Rodgers, M., Healy, M.G., Mulqueen, J. 2005. Organic carbon removal and
486 nitrification of high strength wastewaters using stratified sand filters. Water
487 Research 39: 3279-3286.
- 488 Ruane, E.M., Murphy, P.N., Healy, M.G., French, P., Rodgers, M. 2011. On-farm
489 treatment of dairy soiled water using aerobic woodchip filters. Water Research
490 45: 6668-6676.
- 491 SI No. 31 of 2014. European Union (Good agricultural practice for protection of
492 waters) Regulations 2014.
493 <https://www.agriculture.gov.ie/media/migration/ruralenvironment/environment/nitrates/SI31of2014290114.pdf>
494
- 495 SI No 254 of 2001. Urban waste water treatment regulations, 2001.
496 <http://www.irishstatutebook.ie/eli/2001/si/254/made/en/print>
- 497 Sweeten, J.M., Wolfe, M.L. 1994. Manure and wastewater management systems for
498 open lot dairy operations. Transactions of the ASAE 37: 1145-1154.
- 499 Wang, H., Magesan, G.N., Bolan, N.S. 2004. An overview of the environmental
500 effects of land application of farm effluents. New Zealand Journal of
501 Agricultural Research 47: 389-403.
- 502 Wijeyekoon, S., Mino, T., Satoh, H., Matsuo, T. 2004. Effects of substrate loading
503 rate on biofilm structure. Water Research 38: 2479-2488.

Table 1 Physical and chemical properties of the influent DSW used in this study.

Parameter	Average \pm standard deviation
COD (mg L ⁻¹)	2798 \pm 1503
SS (mg L ⁻¹)	874 \pm 614
TN (mg L ⁻¹)	81.5 \pm 34.1
NH ₄ -N (mg L ⁻¹)	63.9 \pm 32.3
TP (mg L ⁻¹)	29.8 \pm 14.4
DRP (mg L ⁻¹)	24.3 \pm 16.0
pH	7.22 \pm 0.71
Dry matter (%)	0.2 \pm 0.1

Table 2 Properties of the filter media used in this study.

Media Type	Grading	Hydraulic conductivity of saturated media (mm s ⁻¹)	Maximum adsorption capacity (g kg ⁻¹)	
			P	N
Woodchip	10 – 20 mm	1.25	-	3
Sand	d ₁₀ = 0.2 mm; UC = 1.4	0.03	136	-

Table 3. Comparative filter areas (per cow) of a full scale filter for average organic loading rates investigated in this study of 155 g COD m⁻² d⁻¹ for woodchip and 35 g COD m⁻² d⁻¹ for sand.

Q ¹ (L d ⁻¹ cow ⁻¹)	COD load ² (g COD d ⁻¹)	Filter area per cow (m ²)	
		Woodchip ³	Sand ⁴
27	73.7	0.48	2.1

¹Minogue et al., 2015;

²Assuming an annual average COD concentration of 2,750 mg L⁻¹;

³Using an OLR of 155 g COD m⁻² d⁻¹;

⁴Using an OLR of 35 g COD m⁻² d⁻¹.

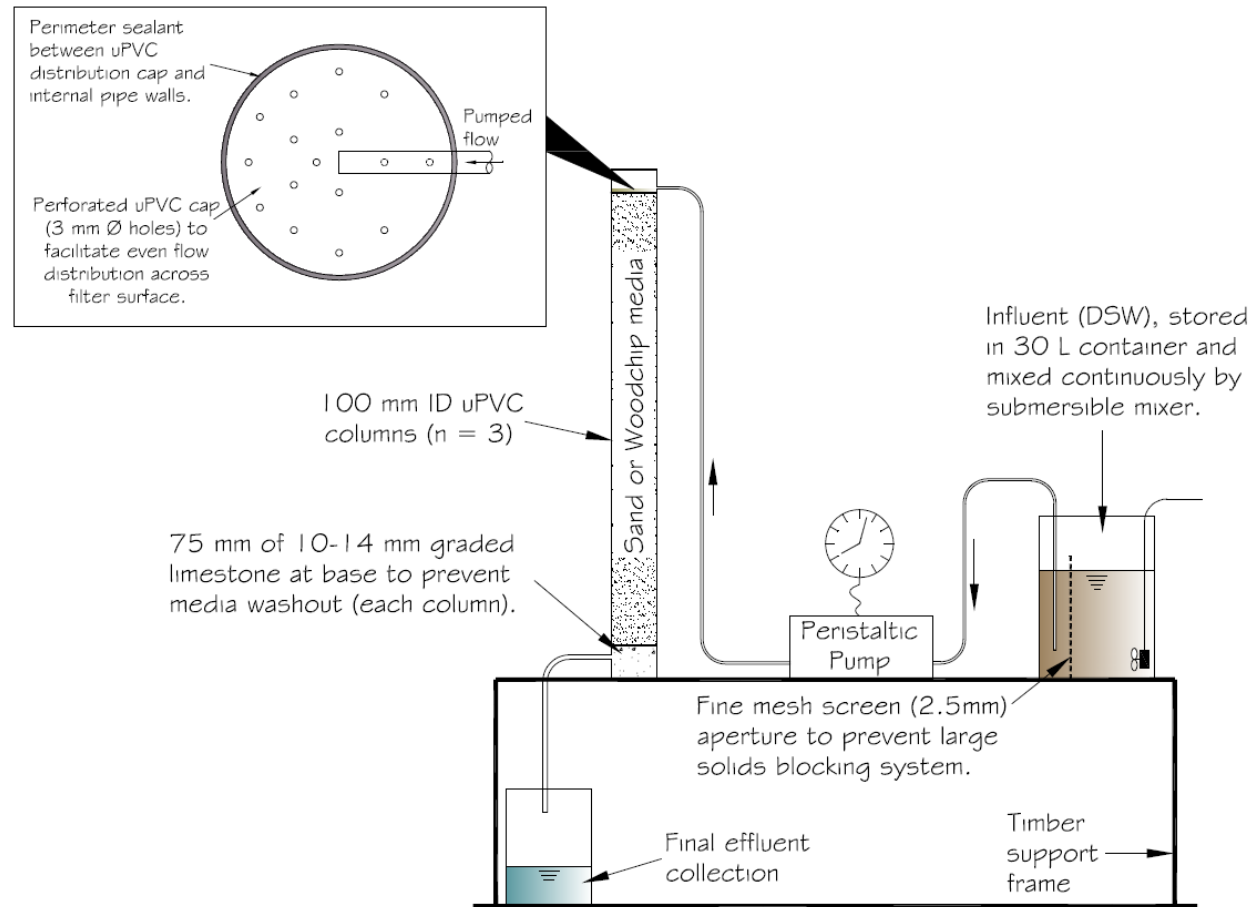


Fig. 1: Schematic diagram of typical laboratory filter setup. (Not to scale)

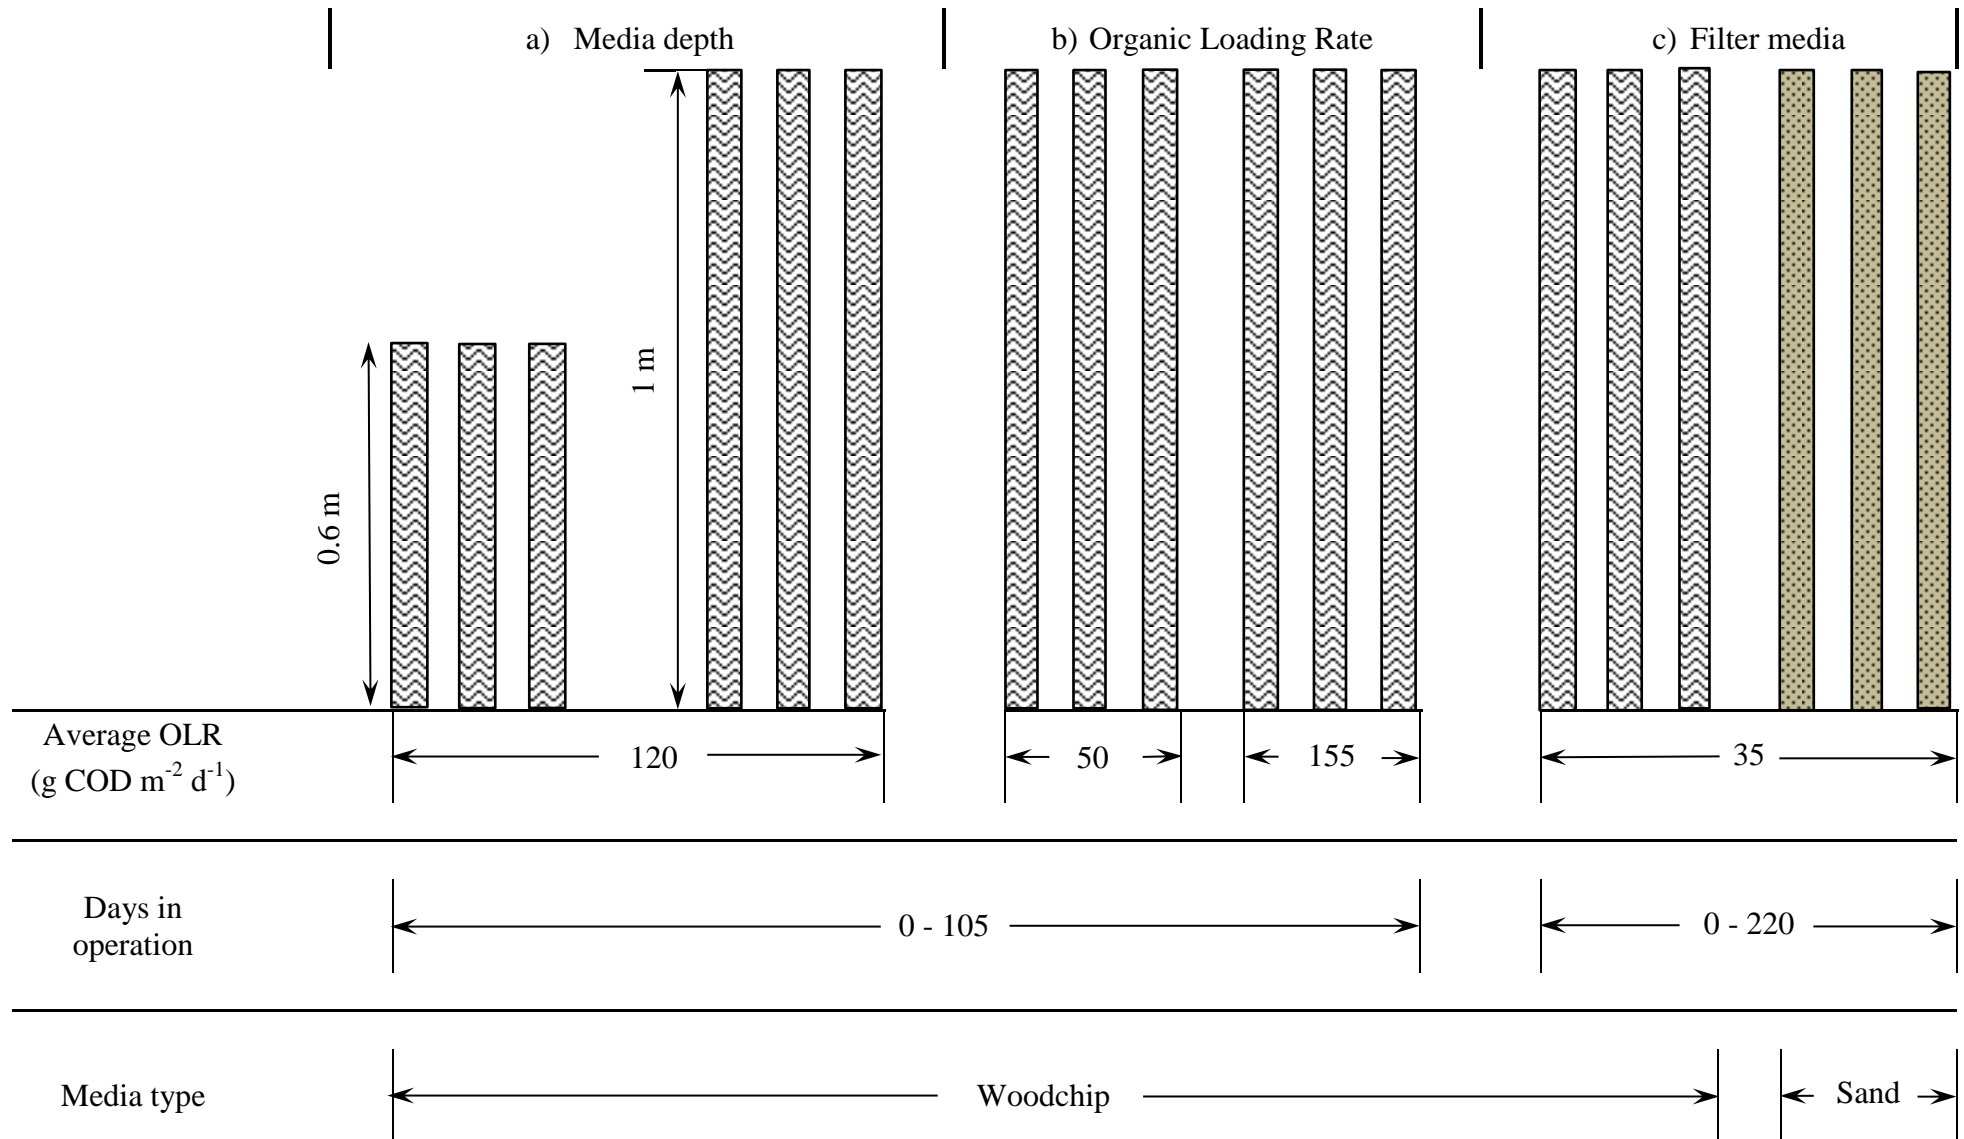


Fig. 2 Combinations of a) media depth, b) organic loading rates and c) filter media used in this study. The woodchip used was 10 - 20 mm Sitka spruce (*picea sitchensis*). The sand used had a $d_{10} = 0.2$ mm and a uniformity coefficient (UC) = 1.4.

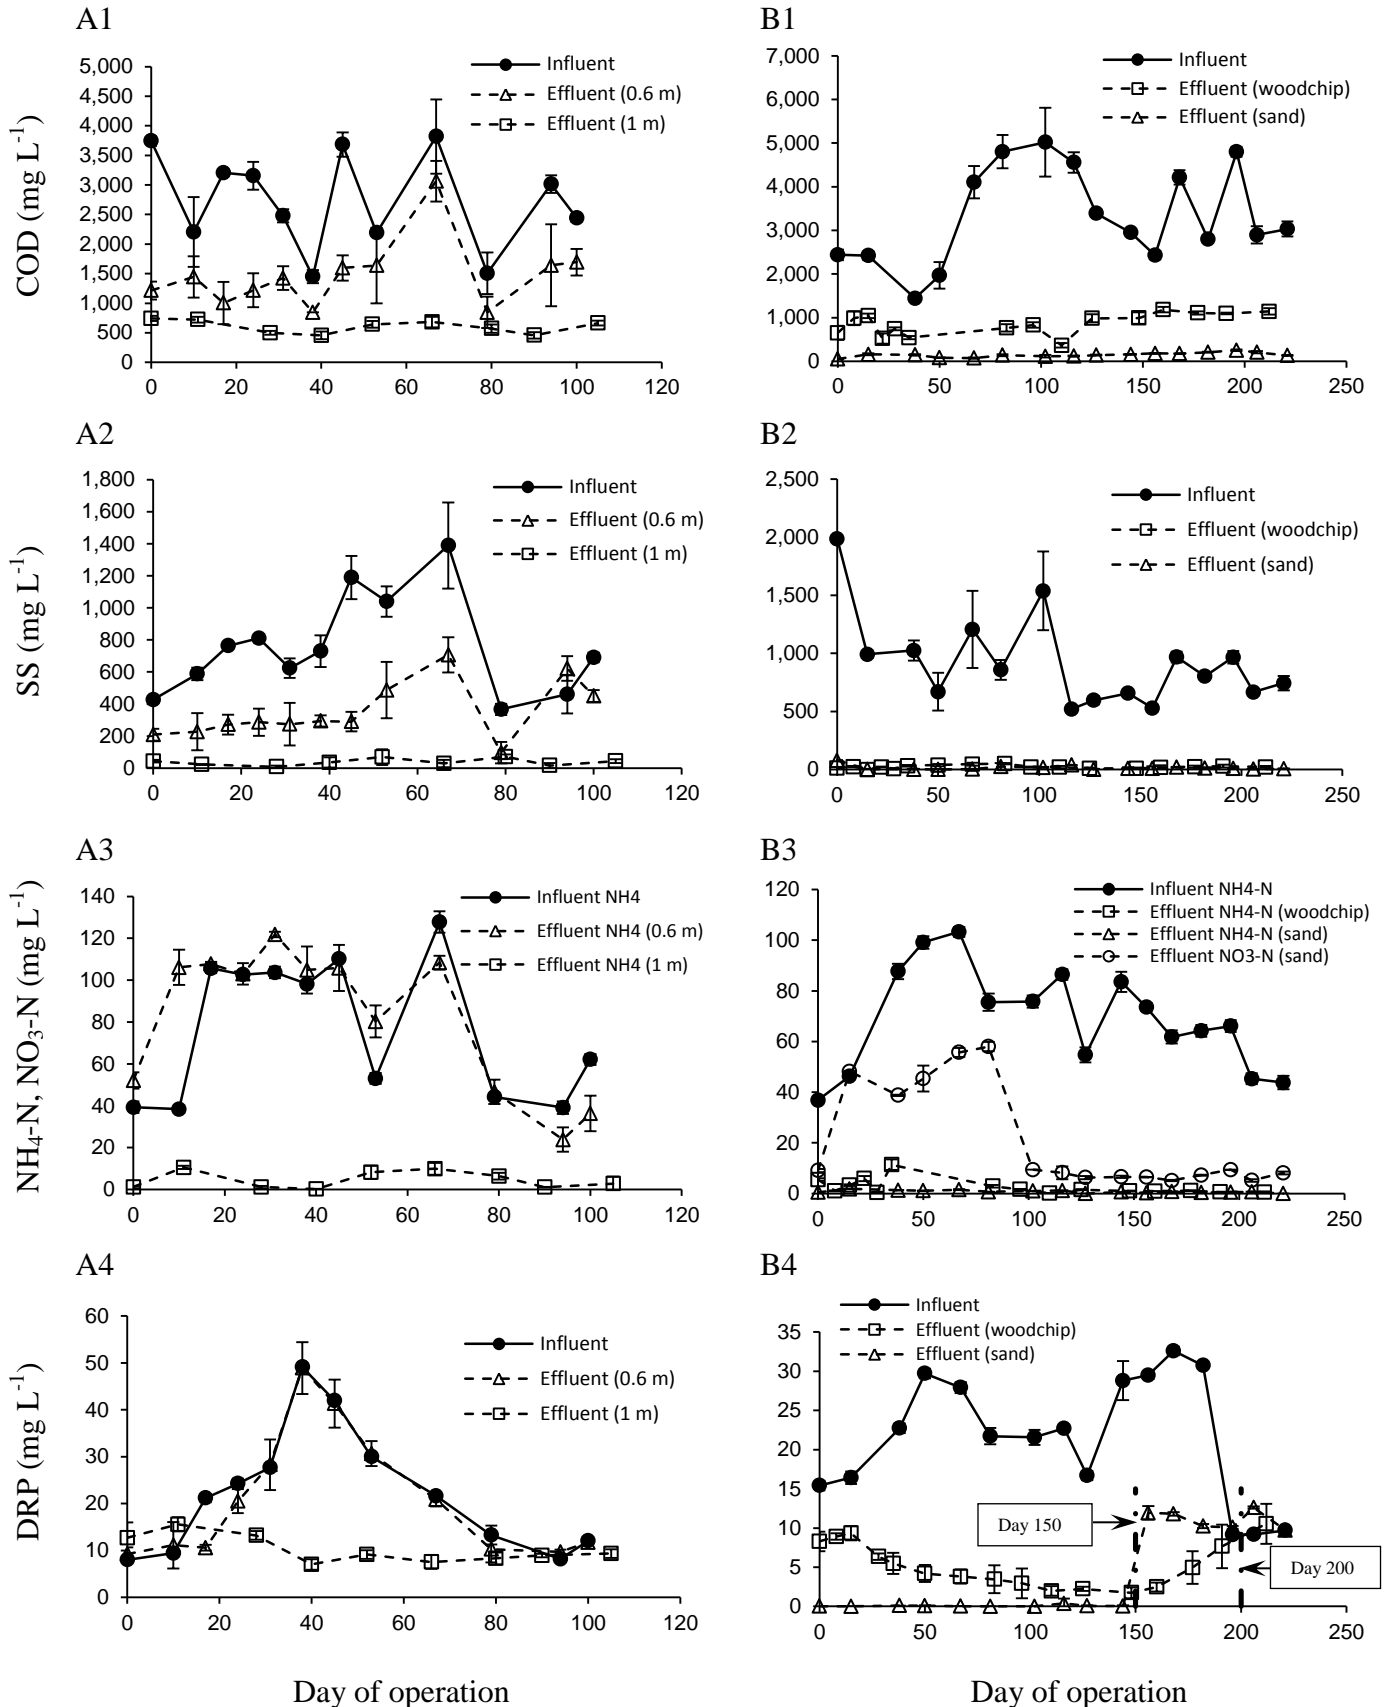


Fig. 3 Impact of media depth (A1 – A4) and media type (B1 – B4) on COD, SS, NH₄-N and DRP removals. An average organic loading rate of 120 g COD m⁻² d⁻¹ was applied to woodchip media (10 – 20 mm Sitka spruce) when comparing the impact of media depth (A1 – A4). An average organic loading rate of 35 g COD m⁻² d⁻¹ was applied to woodchip (10 – 20 mm Sitka spruce) and sand (d₁₀ = 0.2 mm, UC = 1.4) media, both 1 m deep when comparing the impact of media type (B1 - B4). Error bars indicate standard deviations.

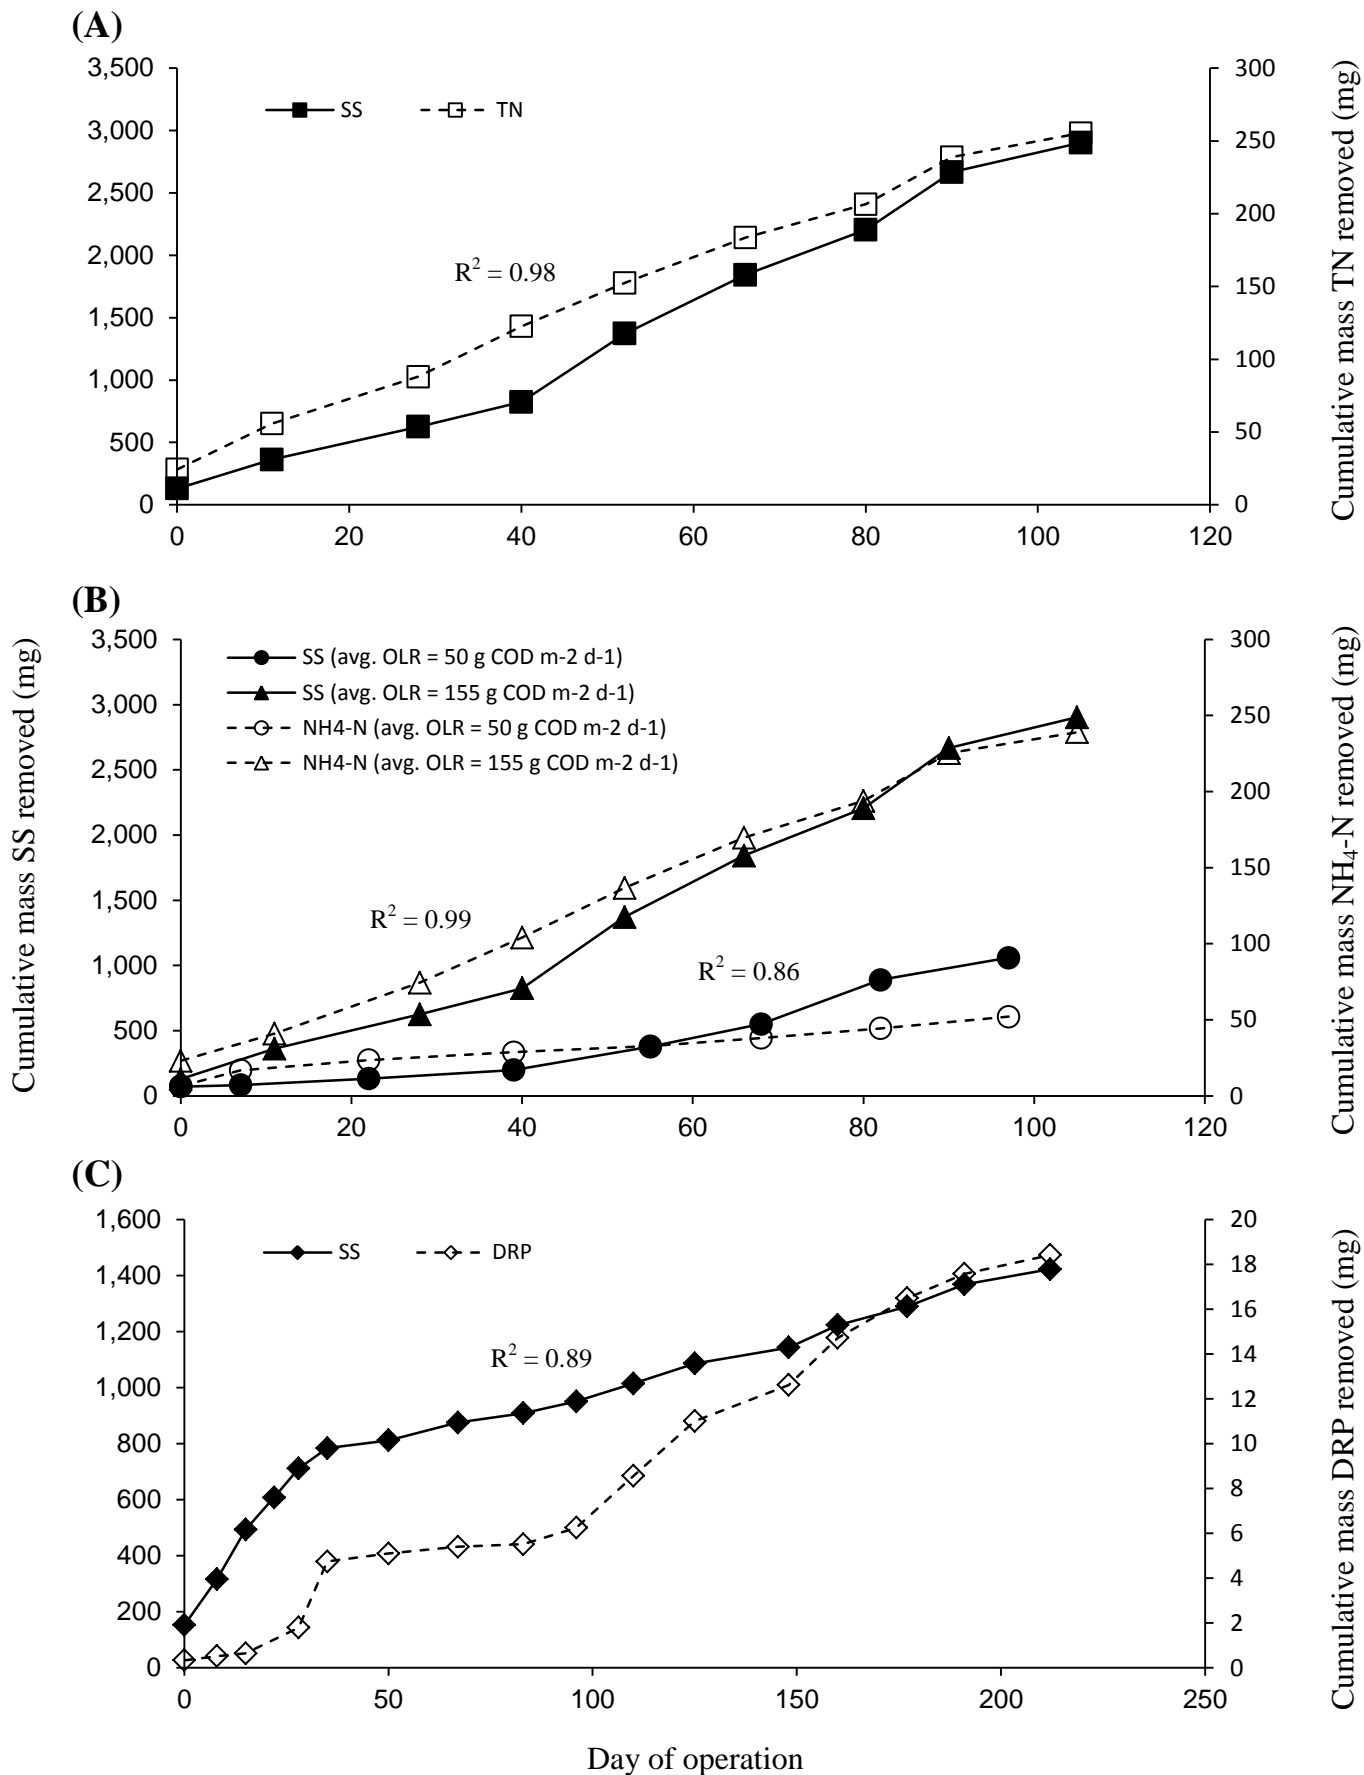


Fig. 4 Correlations between cumulative mass removals of suspended solids (SS) for 1 m deep \times 0.1 m \varnothing woodchip filters ($n=3$, each set) and **(A)** TN loaded at $120 \text{ g COD m}^{-2} \text{ d}^{-1}$ **(B)** $\text{NH}_4\text{-N}$ loaded at 50 and $155 \text{ g COD m}^{-2} \text{ d}^{-1}$ respectively and **(C)** DRP loaded at $35 \text{ g COD m}^{-2} \text{ d}^{-1}$. Correlation coefficients, (R^2) indicated.




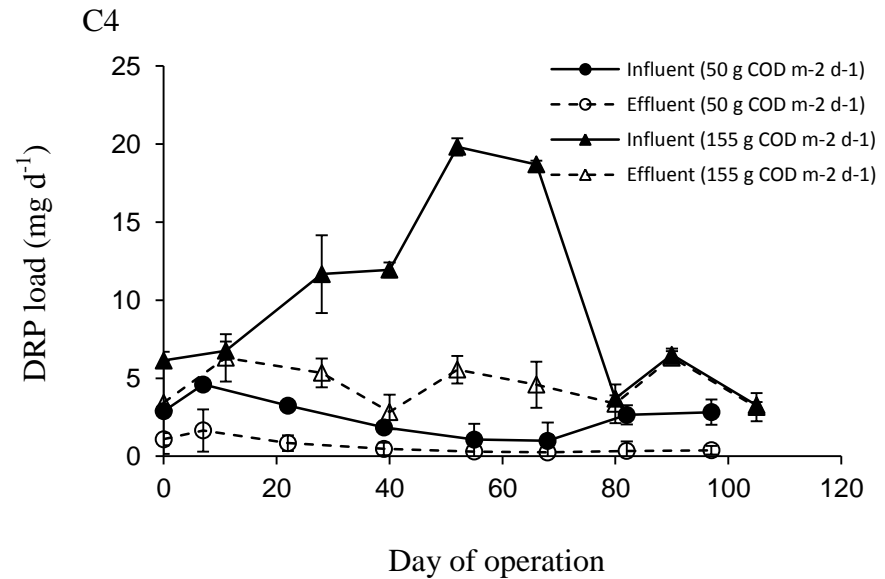


Fig. 5 Impact of organic loading rates on COD, SS, NH₄-N and DRP mass removals. The filter material used was 10 – 20 mm Sitka spruce woodchip, 1 m deep. Error bars indicate standard deviations.

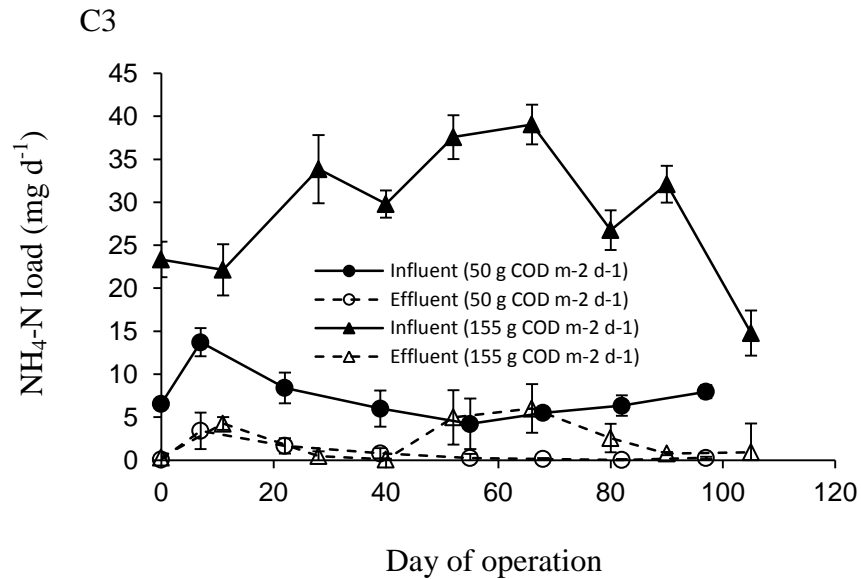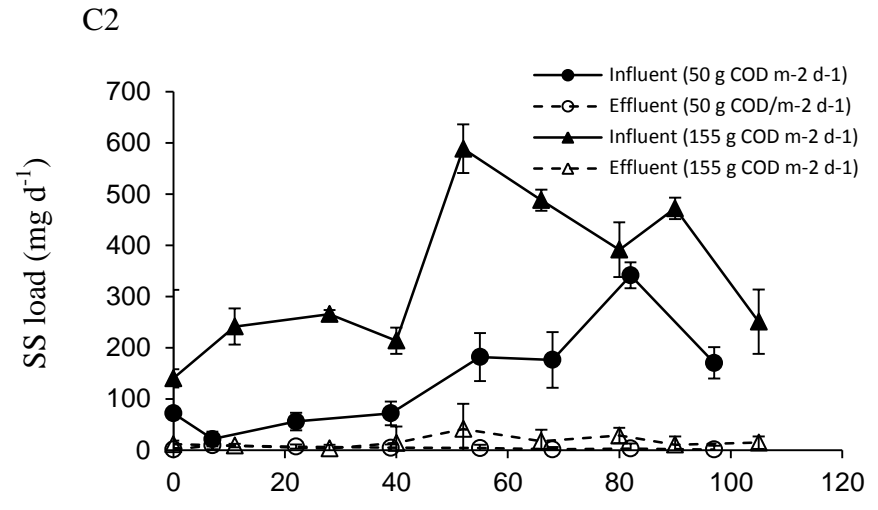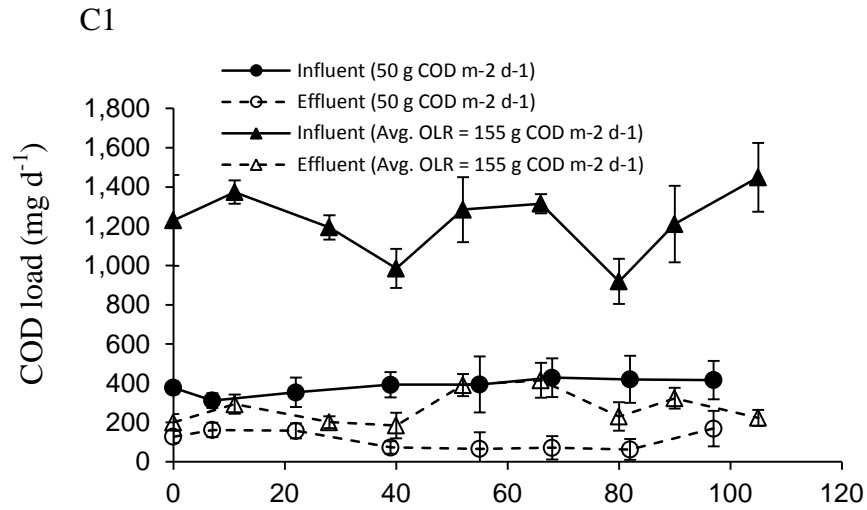